


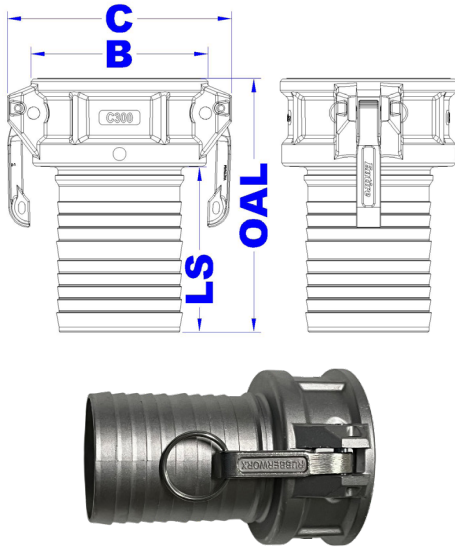

	Aluminum Part #	Brass Part #	Polypropylene Part #	316 Stainless Steel Part #
1/2"	RBX-C-AL-050	RBX-C-BR-050	RBX-C-PP-050	RBX-C-316-050
3/4"	RBX-C-AL-075	RBX-C-BR-075	RBX-C-PP-075	RBX-C-316-075
1"	RBX-C-AL-100-C	RBX-C-BR-100	RBX-C-PP-100	RBX-C-316-100-C
1 1/4"	RBX-C-AL-125	RBX-C-BR-125	RBX-C-PP-125	RBX-C-316-125
1 1/2"	RBX-C-AL-150-C	RBX-C-BR-150	RBX-C-PP-150	RBX-C-316-150-C
2"	RBX-C-AL-200-C	RBX-C-BR-200-C	RBX-C-PP-200	RBX-C-316-200-C
2 1/2"	RBX-C-AL-250	RBX-C-BR-250		RBX-C-316-250
3"	RBX-C-AL-300-C	RBX-C-BR-300-C	RBX-C-PP-300	RBX-C-316-300-C
4"	RBX-C-AL-400-C	RBX-C-BR-400-C	RBX-C-PP-400	RBX-C-316-400-C
5"	RBX-C-AL-500	RBX-C-BR-500		RBX-C-316-500
6"	RBX-C-AL-600-C	RBX-C-BR-600-C		RBX-C-316-600
8"	RBX-C-AL-800-C			

Aluminum

		1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	5"	6"	8"
OAL	Overall length	2.81	3.19	3.94	4.28	4.75	5.20	5.36	6.14	6.51	7.12	9.26	9.80
B	Width of cam	1.24	1.61	1.91	2.27	2.66	3.03	3.65	4.31	5.54	6.59	7.94	10.16
C	Width including arms	1.44	2.46	2.68	3.03	3.54	3.94	4.66	5.43	6.52	7.73	9.16	11.42
LS	Length of shank	1.54	1.93	2.19	2.30	2.95	3.15	3.35	3.99	4.00	4.69	6.68	7.17
	Weight (lbs.)	0.12	0.22	0.35	0.62	0.76	0.91	1.06	1.65	2.39	3.36	5.52	9.18

Brass

		1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	5"	6"	8"
OAL	Overall length	2.80	3.22	3.92	4.32	4.59	5.20	6.00	6.16	6.57	7.21	9.06	
B	Width of cam	1.24	1.61	1.88	2.18	2.67	3.00	3.69	4.35	5.49	6.56	7.72	
C	Width including arms	1.48	2.40	2.84	3.00	3.38	4.07	4.43	5.25	6.72	7.06	9.00	
LS	Length of shank	1.50	1.96	2.19	2.25	2.62	2.79	3.76	4.02	4.31	4.83	6.54	
	Weight (lbs.)	0.30	0.55	0.88	1.23	1.76	2.20	3.43	3.74	7.04	8.58	11.62	

Polypropylene

		1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	5"	6"	8"
OAL	Overall length	2.82	3.27	3.89	4.12	4.13	4.21		6.34	6.48			
B	Width of cam	1.75	1.76	1.91	2.31	2.68	2.68		4.46	5.68			
C	Width including arms	2.49	2.50	2.88	3.51	3.72	3.73		5.39	6.71			
LS	Length of shank	1.52	1.93	2.24	2.29	2.32	2.38		4.00	4.18			
	Weight (lbs.)	0.15	0.15	0.22	0.43	0.50	0.50		1.08	1.70			

316 Stainless Steel

		1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	5"	6"	8"
OAL	Overall length	2.49	3.70	4.12	4.28	4.54	4.98	5.46	5.98	6.42	7.70	8.98	
B	Width of cam	1.30	1.59	1.77	2.28	2.59	3.00	3.62	4.30	5.57	6.57	7.72	
C	Width including arms	1.58	2.49	2.92	3.30	3.55	3.93	4.67	5.43	6.36	7.02	9.33	
LS	Length of shank	1.30	1.92	2.40	2.69	2.69	3.01	3.28	3.87	4.28	5.58	6.54	
	Weight (lbs.)	0.29	0.51	0.79	1.32	1.50	1.72	2.57	3.19	4.62	8.32	10.56	

