


10012 REINFORCED PVC WATER SUCTION AND DISCHARGE

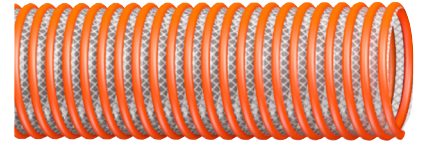

This medium-duty water suction and discharge hose is designed for use in construction, dewatering, agricultural and industrial applications. PVC tube reinforced with a synthetic textile braid and orange PVC helix. PVC tube is designed to handle residual chemicals in water transfer applications.

TUBE:	Clear PVC
REINFORCEMENT:	Textile Braid With Orange PVC Helix
TEMPERATURE:	-13°F to 140°F

PART #	ID			OD			WP		BEND RADIUS		VACUUM PRESSURE	WEIGHT		PACKAGING (ft)
	Fraction (in)	Decimal (in)	Metric (mm)	Fraction (in)	Decimal (in)	Metric (mm)	PSI	Bar	Decimal (in)	Metric (mm)	inHg	(lb/ft)	(kg/m)	
10012-150	1 1/2	1.50	38	2 2/64	2.03	52	110	8	3	64	29	0.47	0.70	100
10012-200	2	2.00	51	2 38/64	2.60	66	100	7	4	102	29	0.69	1.03	100
10012-250	2 1/2	2.50	64	3 1/64	3.01	76	100	7	4	102	29	0.69	1.03	20, 100
10012-300	3	3.00	76	3 45/64	3.70	94	100	7	6	152	28	1.13	1.68	20, 100
10012-400	4	4.00	102	4 50/64	4.78	121	80	6	7	178	28	1.74	2.59	20, 100
10012-600	6	6.00	152	7 11/64	7.17	182	70	5	10	254	28	3.88	5.77	20, 100
10012-800	8	8.00	203	9 22/64	9.34	237	60	4	16	406	28	5.55	8.26	20, 60
10012-1000	10	10.00	254	11 40/64	11.63	295	40	3	25	635	28	8.90	13.24	20, 60
10012-1200	12	12.00	305	13 51/6	13.80	351	28	2	45	1143	25	10.30	15.33	20, 60