


8P021 CORRUGATED PTFE TUBE WITH 316/304SS SINGLE BRAID

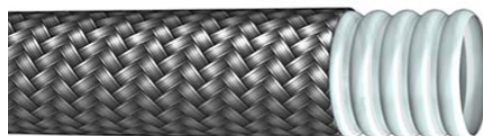

TUBE	Helically convoluted sintered tube of polytetrafluoroethylene (PTFE)
COVER	Single braid of 316/304 series of stainless steel wire
TEMPERATURE	-65°F to 500°F

PART #	Dash Size	ID			OD			WP		BEND RADIUS		WEIGHT		PACKAGING (ft)
		Fraction (in)	Decimal (in)	Metric (mm)	Fraction (in)	Decimal (in)	Metric (mm)	PSI	Bar	Decimal (in)	Metric (mm)	(lb/ft)	(kg/m)	
8P021-019	-4	1/4	0.25	6	26/64	0.41	10	2500	175	0.80	20	0.10	0.15	100
8P021-025	-5	5/16	0.31	8	31/64	0.49	12	2300	160	0.80	20	0.11	0.17	100
8P021-031	-6	3/8	0.38	10	35/64	0.54	14	1740	120	0.80	20	0.12	0.18	100
8P021-041	-8	1/2	0.50	13	46/64	0.73	18	1595	110	1.00	25	0.19	0.29	100
8P021-050	-10	5/8	0.63	16	53/64	0.83	21	1450	100	2.00	51	0.23	0.35	100
8P021-063	-12	3/4	0.75	19	1 1/64	1.02	26	1160	80	2.60	66	0.33	0.49	100
8P021-075	-14	7/8	0.88	22	1 11/64	1.17	30	870	60	3.10	79	0.38	0.57	100
8P021-088	-16	1	1.00	25	1 21/64	1.33	34	800	55	3.60	91	0.45	0.68	100
8P021-100	-20	1 1/4	1.25	32	1 44/64	1.68	43	665	45	4.40	112	0.60	0.89	100
8P021-113	-24	1 1/2	1.50	38	1 57/64	1.89	48	510	35	6.00	152	0.64	0.96	100
8P021-150	-32	2	2.00	51	2 27/64	2.42	62	365	25	8.00	203	0.88	1.31	100
8P021-200	-48	3	3.00	76	3 32/64	3.50	89	236	16	12.20	310	1.04	1.55	100